

VOLKTEK

IEN-9648M

L2+ Managed 8 x 10/100/1000 RJ45 & 4 x GbE SFP Industrial Switch, DNV Marine Approval

Description

Volktek's IEN-9648M Managed Industrial switch is equipped with 8 port 10/100/1000Base-T and 4 Gigabit SFP slots. Under DNV (Det Norske Veritas) certified for Industrial switch, the IEN-9648M suits your anti-corrosion harsh environments in marine & offshore applications and contains all the standard features of a industrial managed switch. Engineered with hardened components and enclosed in a rugged case, the switch can operate in wide temperatures from -40°C to 75°C and excellent tolerance capability to high vibration and shock.

IEN-9648M is a Layer 2+ switch that offers additional enhanced features for encompassed management with RMON, SNMP v1/v2c/v3, SNTTP, network recovery in milliseconds, and advanced network cybersecurity features and traffic control.



RoHS CE FC



Features Highlight


Robust Switch Performance

IEN-9648M is built with IP30 aluminum case protection, surge and ESD protection to deliver robust performance and withstand extreme conditions in Industrial environments. The SFP ports support 1000Mbps for high bandwidth transmissions and the SFP DDM feature enables service providers to monitor SFP parameters. In case of any abnormal hardware condition, the switch automatically sends warnings through email and relay output with real-time alarm messages. This assists the system administrators to immediately react to emergency events and diagnose the faults more efficiently for smoother network operations.



Redundant Power Input system

Mission-critical industrial applications need to operate without any interruptions because even a minimum network downtime can hugely impact the overall output. Providing continuous power as well as data to such applications is now made easy with IEN-9648M redundant power system. The switch is designed with standard industrial terminal block for redundant power. In case the primary power supply fails, the secondary power will enable the switch to provide continuous service.

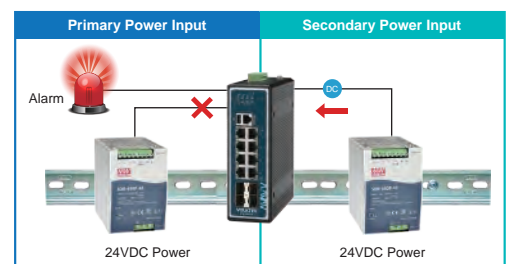

Efficient network monitoring and proactive capability

In a network, the issues that impact network performance can be quickly resolved with the IEN-9648M most accepted and enhanced traffic management, monitoring and analysis protocols such as SNMP and RMON. SNMP allows end users to centrally manage different levels in a network and RMON gives the capability to monitor the network performance. Service providers can ensure a reliable network by identifying connectivity and performance issues and isolating the problem remotely on individual switches. This avoids high OPEX and provides administrators the control they need to manage a healthy and efficient network.

Bandwidth management to prevent unpredictable network status

Industrial surveillance applications need different levels of services delivered to them reliably without any transmission delays and interruptions. The IEN-9648M has comprehensive QoS mechanisms which assign priority to applications and sends only specific dedicated traffic to them. In addition, bandwidth management function of the switch allocates high bandwidths to mission-critical communications and reduce the bandwidth to applications that are less critical. With full control of limiting the bandwidth, the administrators can prevent unpredictable errors and utilize the bandwidth more effectively.

Redundant Ring and Fast Recovery for Surveillance System

Even few seconds of missed communications due to link failures, especially in IP surveillance systems, can cause inconvenience and recovering it becomes very critical. Featuring with Xpress Ring, IEN-9648M can rapidly react to such link failures and recovers it within less than 10ms, a much faster fail-over time to support nonstop transmissions. And to handle the heavy traffic load of video and data, the switch implements.



Certificates & Approvals

Marine

Type Approval


TYPE APPROVED PRODUCT

 DNV.COM/AF

IEC 60945 / IACS E10

Marine Certifications Ensure Secure Communication Networks for Offshore Environments

Applications

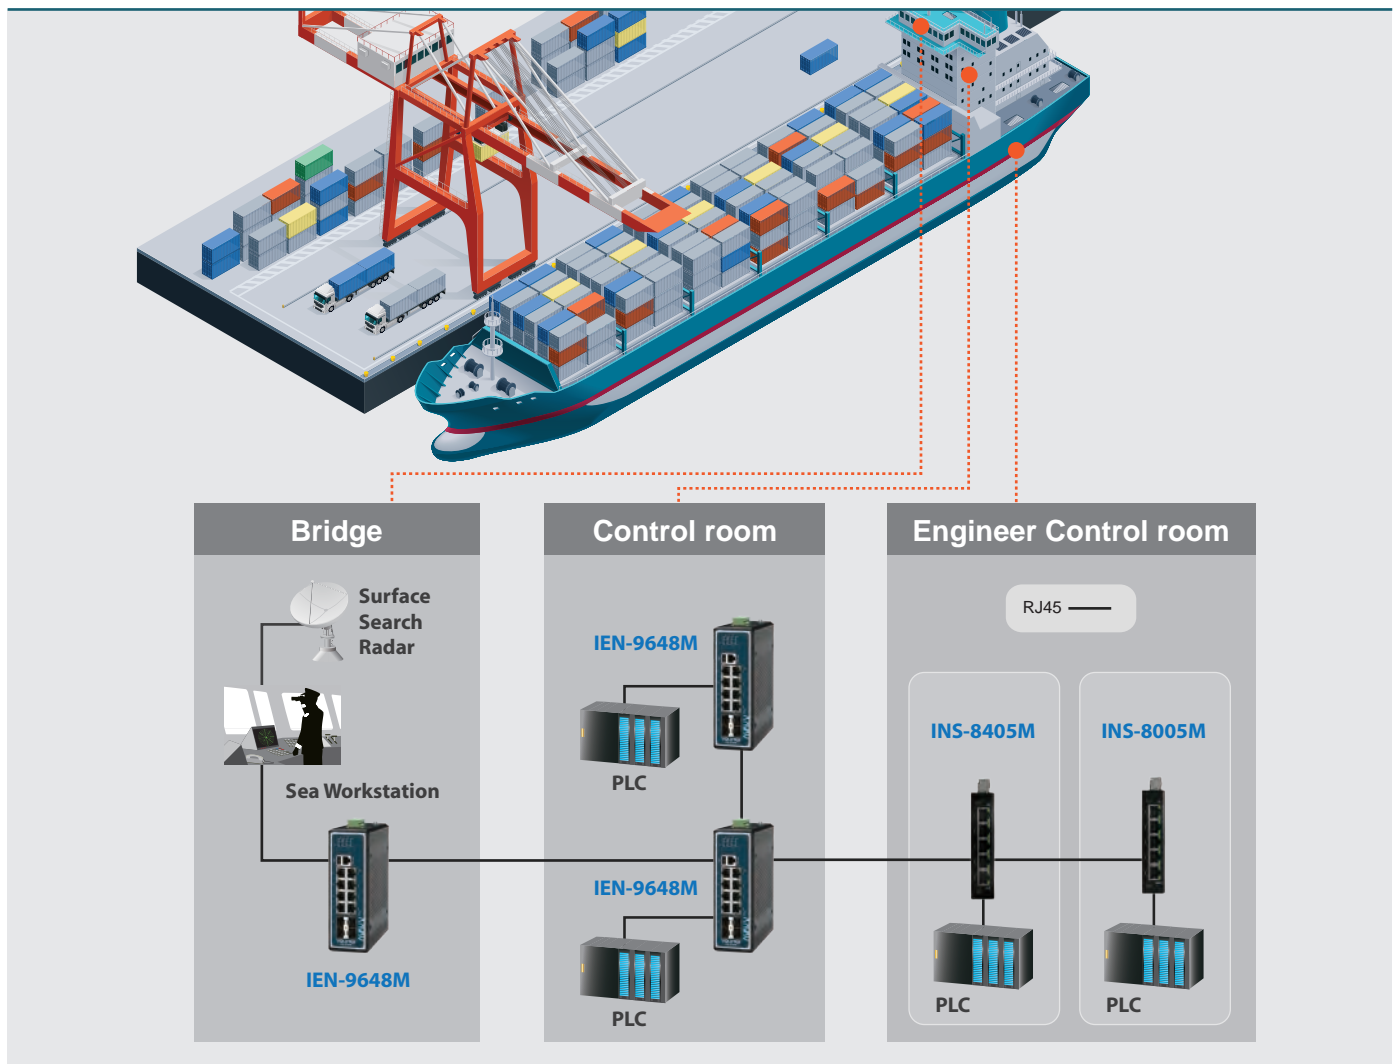

Specifications

Standards		
IEEE 802.3	10BASE-T	
IEEE 802.3u	100BASE-TX	
IEEE 802.3ab	1000BASE-T	
IEEE 802.3z	1000BASE-SX/LX	
IEEE 802.3	Nway Auto-negotiation	
IEEE 802.3x	Flow Control	
IEEE 802.3ad	Link Aggregation	
IEEE 802.3az	Energy Efficient Ethernet (EEE)	
IEEE 802.1AB	LLDP	
IEEE 802.1ad	QinQ	
IEEE 802.1D	STP	
IEEE 802.1w	RSTP	
IEEE 802.1s	MSTP	
IEEE 802.1p	Class of Service	
IEEE 802.1Q	VLAN Tagging	
IEEE 802.1X	Port Authentication	
IEEE 1588v2	PTP	
Interface		
Ports	8 x 10/100/1000BASE-T (PoE RJ45) 4 x GbE SFP Slots 1 x RJ45 Console Port 1 x USB Port	
DIP Switch	Primary/Redundant Power Voltage Drop Alarm setting	
LED Panel	PWR, RPS, ALM, POST, PoE, 1000, LNK/ACT	
Features		
Performance	Jumbo frame Size: 10KBytes MAC Table Entries: 16K Active VLAN: 4K Switch Fabric: 24Gbps L2 Forwarding Rate: 17.9Mpps	
Management	CLI, Telnet/SSH, HTTP/HTTPS, SNMP v1/v2c/v3, RMON Statistics, SNMP Trap, MVLAN, Firmware Upgradable, Configuration Backup/Restore, Syslog, SNTTP, DHCP Client/Relay/Option 82, DHCP Option 66/67, Service Control, SFP DDM/Info, Mirroring, Auto-Provisioning, Modbus TCP, LLDP, UDLD, IEEE 1588 v1/v2, EEE, e-mail Alarm, Service Control, PPPoE IA, MAC Aging Time	
Reliability	STP/RSTP/MSTP, Xpress Ring, ERPS v1/v2, Dual Homing, LACP, Code Redundancy, Static Trunk	
VLAN	IEEE 802.1Q, GARP/GVRP, Port-based VLAN, MAC-based VLAN, IP Subnet-based VLAN, Protocol-based VLAN, QinQ, VLAN Translation, Service-based VLAN	
Traffic Control	IGMP snooping v1/v2/v3/, IGMP Querier/Throttling/Proxy, MLD Snooping, MVR, 802.1p QoS, Flow Control, Abnormal Traffic Detection, Rate Limit, Storm Control, Port Isolation, Loop Detection, Static Route, Inter-VLAN Routing	
Security	DHCP Snooping, ACL, SSH, Port Security, Port-based 802.1x, TACACS+, MAC Search, Refusal MAC, Static MAC, DHCP Server Screening, ARP Inspection, BPDU Guard/Filter, Root Guard, Management Host	
Power		
Input Voltage	Primary inputs: 12-48V DC Redundant inputs: 12-48V DC	
Connection	Terminal Block	
Power Consumption	System: 18W	
Alarm Relay	One relay output, 1 A @ 24V DC	
Mechanical and Environment		
Housing	Aluminum (IP30 Protection)	
Mounting	DIN-Rail	
Operating Temperature	-40°C~75°C (-40°F~167°F)	
Storage Temperature	-40°C~85°C (-40°F~185°F)	
Operating Humidity	5 to 95% RH (non-condensing)	
Storage Humidity	5 to 95% RH (non-condensing)	
Weight	955 g (2.1 lb)	
Dimension (WxHxD)	50 x 160 x 120 mm (1.97 x 6.3 x 4.72 in)	
Certifications		
CE	EMI	FCC Part 15 Subpart B Class A EN 55011 / BS EN 55011 Class A EN 55032 / BS EN 55032 Class A EN 61000-6-4 / BS EN 61000-6-4
	EMS	EN 55035 / BS EN 55035 EN 61000-6-2 / BS EN 61000-6-2 EN 61000-4-2 (ESD) , EN 61000-4-3 (RS) EN 61000-4-4 (Burst), EN 61000-4-5 (Surge) EN 61000-4-6 (CS), EN 61000-4-8 (PFMF)
Marine		DNV-CS-0339:2016 DNV-RU-SHIP-Pt4Ch9:2018 IEC-60945, IACS E10 (Rev.6 2014) LR certify environmental category ENV1, ENV2, and ENV3
Shock		IEC 60068-2-27
Freefall		IEC 60068-2-31
Vibration		IEC 60068-2-6
Ordering Information		
IEN-9648M	L2+ Managed 8 x 10/100/1000 RJ45 & 4 x GbE SFP Switch, -40°C~75°C (-40°F~167°F)	
Optional Accessories		
Power Supply	SDR-120-48: 120W DIN-Rail, 48VDC, Industrial Power Supply with PFC Function	
GBM-104	1000BASE-SX 1.25G, Multi-mode SFP, 500m	
GBM-123TS	1000BASE-LX, Bi-Di SFP TX:1310/RX:1550 Single Mode, 10Km, 0°C~70°C (32°F~158°F)	
GBM-123RS	1000BASE-LX, Bi-Di SFP TX:1550/RX:1310 Single Mode, 10Km, 0°C~70°C (32°F~158°F)	

Note :

* The SFP communication distance upon the request.

* Industrial SFP with wide operating temperature from -40°C~85°C (-40°F~185°F) is available upon request.

* The highest degree of temperature operation certified by DNV is (Class D) -25°C~70°C (-13°F~158°F), and the nominal voltage of 24VDC for DNV type approval is specified.

* Specifications subject to change without notice.

Dimension

